

## Power Transducer Series

### MULTI POWER MONITOR


(4 digital displays, CC-Link)

#### Functions & Features

- Measures simultaneously several variables of a heavy-current power system: current, voltage, active, reactive and apparent power, active and reactive energy, power factor, frequency, etc.
- All measured values, counter values, display mode, setting data are stored in the non-volatile memory at the power off
- Parameters are programmable using the front buttons or the PC via infrared interface
- Mounted using M5 screws or mounting brackets
- 60-segment bargraph
- Displayed measurands are freely selectable
- Open collector output for alarm or energy count
- Loop test output

#### Typical Applications

- Multi-functional power monitor incorporated in an electric device: saves space, wiring works, and cost

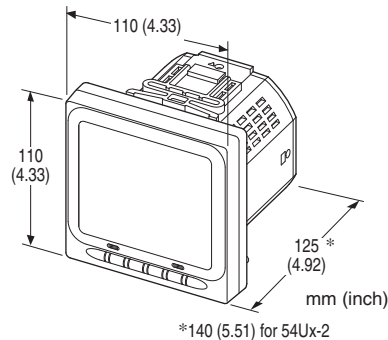

### MODEL: 54UC-[1][2][3][4]-AD4[5]

#### ORDERING INFORMATION

- Code number: 54UC-[1][2][3][4]-AD4[5]
- Specify a code from below for each of [1] through [5]. (e.g. 54UC-1211-AD4/E/Q)
- Specify the specification for option code /Q (e.g. /C01/S01)

#### [1] CONFIGURATION

- 1: Single phase / 2-wire and 3-wire, 3-phase / 3-wire
- 2: Single phase / 2-wire and 3-wire, 3-phase / 3-wire and 4-wire

#### [2] INPUT

- 1: 480 V / 1 A AC
- 2: 480 V / 5 A AC

#### [3] DISCRETE INPUT

- 0: None ('External Interface' code 1 Not selectable.)
- 1: 24V DC ('External Interface' codes 2 Not selectable.)
- 2: 110V DC ('External Interface' codes 2 Not selectable.)

#### [4] EXTERNAL INTERFACE

- 1: CC-Link, Do × 1, Di × 1
- 2: CC-Link, Do × 2

#### AUXILIARY POWER SUPPLY

- AD4: universal
- 100 - 240 V AC (Operational range 85 - 264 V, 50 / 60 Hz) /
- 110 - 240 V DC (Operational range 99 - 264 V, ripple 10 %p-p max)

#### [5] OPTIONS (multiple selections)

##### Language

- blank: Japanese
- /E: English

##### Other Options

- blank: none
- /Q: Option other than the above (specify the specification)

#### SPECIFICATIONS OF OPTION: Q (multiple selections)

##### COATING (For the detail, refer to M-System's web site.)

Moving parts and indicators are not coated.

- /C01: Silicone coating
- /C02: Polyurethane coating
- /C03: Rubber coating

##### TERMINAL SCREW MATERIAL

- /S01: Stainless steel

#### RELATED PRODUCTS

- Infrared Communication Adaptor (model: COP-IRU)
  - PC configurator software (model: PMCFG)
- Downloadable at M-System's web site.

#### PACKAGE INCLUDES...

- Terminating resistor (110 Ω, 0.5 W)

#### GENERAL SPECIFICATIONS

Construction: 110-mm square panel flush mounted

Degree of protection

Front panel: IP 50

**Terminal block, housing:** IP 30

**Connection**

**Voltage input:** M4 screw terminals (torque 1.4 N·m)

**Current input:** M4 screw terminals (torque 1.4 N·m)

**Discrete input, discrete output, CC-Link, auxiliary power supply:** M3 screw terminals (torque 0.6 N·m)

**Configuration**

**Code 1:** Single phase/2-wire and 3-wire, 3-phase/3- wire balanced/unbalanced load

**Code 2:** Single phase/2-wire and 3-wire, 3-phase/3- wire balanced/unbalanced load, 3-phase/4- wire balanced/unbalanced load

**Screw terminal**

- **M3 screw:** Nickel-plated steel (standard) or stainless steel
- **M4 screw:** Nickel-plated brass (standard) or stainless steel

**Housing material:** Flame-resistant resin (black)

**Isolation:** Voltage input to current input to discrete input to CC-Link to discrete output to power to FG1

■ **Measured variables**

**Voltage:** 1 - 2, 2 - 3, 3 - 1, 1 - N, 2 - N, 3 - N

**Current:** 1, 2, 3, N

**Active / reactive / apparent power:** 1, 2, 3, Σ

**Power factor:** 1, 2, 3, Σ

**Frequency**

**Phase angle between voltages:** 1 - 2, 2 - 3, 3 - 1

**Active energy incoming / outgoing:** Σ

**Reactive energy inductive / capacitive:** Σ

**Apparent energy:** Σ

**Active / reactive / apparent power intervals (demand)**

**Current intervals (demand):** 1, 2, 3, N

**Harmonic contents:** Σ, 2nd to 31st

**Voltage:** 1 - 2, 2 - 3, 3 - 1, 1 - N, 2 - N, 3 - N

**Current:** 1, 2, 3, N

**Max. and min. values:** 1 = R, 2 = S, 3 = T

**Infrared communication:** Transmission distance max. 1 meter (for use with the COP-IRU and PMCFG)

■ **DISPLAY:** LCD with LED backlight (LED OFF timer available)

**Signed:** 4 digits, 2 lines

**Energy:** 9 digits, 1 line

**Bargraph:** 1 point (60 segments)

## CC-Link COMMUNICATION

**Transmission:** CC-Link Version 1.10

**Transmission cable:** Conforms to CC-Link

**Node address setting:** Control buttons; 1 - 64

**Device type:** Remote device station

**Required node:** 1

**Transfer rate:** Control buttons

**Communication status display:** refer to the table below

COM. SEGMENT	STATUS
Turn on	Normal communications
Blinking (ON & OFF: 1 sec.)	CC-Link settings changed
Turn off	No communication

## INPUT SPECIFICATIONS

**Frequency:** 50 / 60 Hz (45 - 65 Hz)

• **Voltage Input**

**Rated voltage**

**Line-to-line (delta voltage):** 480 V

**Line-neutral (phase voltage):** 277 V

**Consumption VA:**  $\leq U_{LN}^2 / 300 \text{ k}\Omega$  / phase

**Overload capacity:** 200 % of rating for 10 sec., 120 % continuous

**Selectable primary voltage range:** 50 - 400 000 V

• **Current Input**

**Rated current:** 1 A or 5 A

**Consumption VA:**  $\leq I^2 \cdot 0.01 \Omega$  / phase

**Overload capacity:** 4000 % of rating for 1 sec., 2000 % for 4 sec., 120 % continuous

**Selectable primary current range:** 1 - 20 000 A

**Operational range**

**Voltage, current, apparent power:**  $\leq 120$  % of the rating

**Active / reactive power:** -120 to +120 % of the rating

**Frequency:** 45 - 65 Hz

**Power factor:** -1 to +1

■ **Discrete Input:** 24 V DC or 110 V DC

(input resistance 6 kΩ)

**Detecting voltage:** External 24 V DC  $\pm 10$  % or 110 V DC  $\pm 10$  %

**ON current:**  $\geq 1 \text{ mA}$  ( $\leq 24 \text{ k}\Omega$  @ 24 V,  $\leq 110 \text{ k}\Omega$  @ 110 V)

**OFF current:**  $\leq 0.1 \text{ mA}$  ( $\geq 240 \text{ k}\Omega$  @ 24 V,  $\geq 1.1 \text{ M}\Omega$  @ 110 V)

**Detecting time:** 10 - 1000 msec.

The status can be monitored on the CC-Link; usable to reset energy count or to update average (demand) value

## OUTPUT SPECIFICATIONS

■ **Open Collector**

Programmable for either alarm or energy count.

**Max. rated load:** 130 V DC @50 mA

**Continuous rated load:** 130 V DC @30 mA

**Saturation voltage:** 1.5 V DC

**Measurands applicable to alarm:** Voltage, current, average current (demand), neutral current, frequency, power, average power (demand)

(ON delay, deadband and other parameters are selectable)

**Measurands applicable to count:** Energy;

Pulse rate selectable within

0.1 - 10 000.0 kWh/p, kvarh/p, kVAh/p

## INSTALLATION

### Power consumption

- AC: < 8 VA
- DC: < 4 W

**Operating temperature:** -10 to +55°C (14 to 131°F)

**Storage temperature:** -20 to +80°C (-4 to +176°F)

**Operating humidity:** 90 % RH max. (non-condensing)

**Mounting:** Panel flush mounting (M5 screws (torque 2 N·m) or mounting brackets)

### Weight

**Configuration Code 1:** 500 g (1.1 lb)

**Configuration Code 2:** 525 g (1.16 lb)

## PERFORMANCE

### Accuracy

(at 23°C ±10°C or 73.4°F ±18°F, 45 - 65 Hz)

**Voltage:** ±0.3 %; Rated voltage at ≥ 100 V,  
100 V at ≥ 20 V to < 100 V

**Current:** ±0.3 %; of Span 1 A or 5 A

**Power:** ±0.5 %; Rated voltage/current at ≥ 100 V

Wattage as listed below at < 100 V:

173.2 W (1 A) or 866 W (5 A) for 3ph/3w

100 W (1 A) or 500 W (5 A) for 1ph/2w

200 W (1 A) or 1000 W (5 A) for 1ph/3w

300 W (1 A) or 1500 W (5 A) for 3ph/4w

**PF:** ±0.5 %

**Frequency:** ±0.1 % of Span

**Energy:** ±1 %

**Harmonic:** ±1 % of Span

**Sampling rate:** 64 samples per cycle

**Data update period:**

**Harmonic contents and frequency:** ≤ 1.1 sec.

**Other:** ≤ 600 msec.

**Response time:** ≤ 2 sec. (0 - 99 %),

≤ 3 sec. for frequency and harmonic contents

**Insulation resistance:** ≥ 100 MΩ with 500 V DC

**Dielectric strength:** 2000 V AC @ 1 minute


(voltage input to current input to discrete input to CC-Link  
to discrete output to power to FG1)

2000 V AC @1 minute (circuits to housing)


## MOUNTING REQUIREMENTS

### ■ PANEL CUTOOUT unit: mm (inch)

- USING MOUNTING SCREWS  
Remove the mounting brackets.

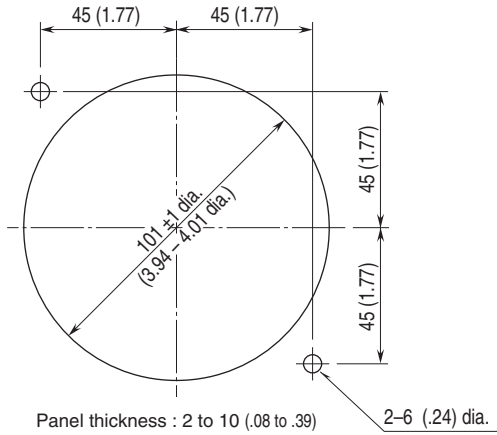


- USING MOUNTING BRACKETS  
Remove the mounting screws.

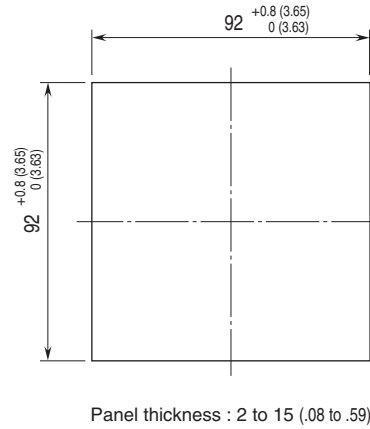


## EXTERNAL VIEW

### ■ FRONT VIEW

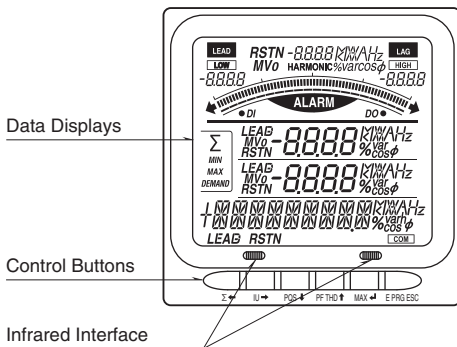


### ■ REAR VIEW

#### • CONFIGURATION CODE: 1

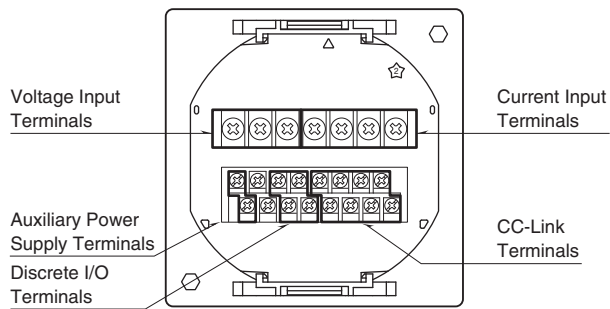


#### • CONFIGURATION CODE: 2

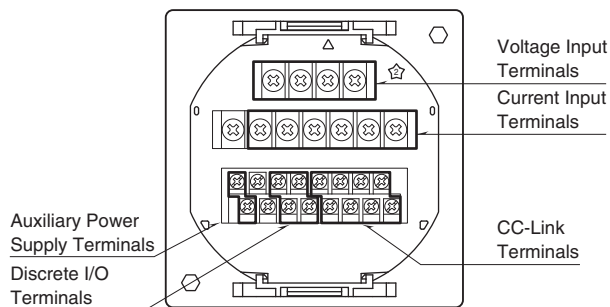

## TERMINAL CONNECTIONS

■ CONFIGURATION CODE: 1

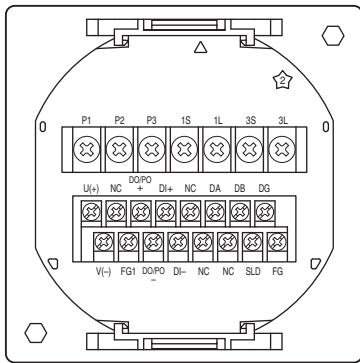


System / Application	Terminal
Single-phase / 2-wire	
Three-phase / 3-wire, balanced load	

Note: For low voltage circuit, grounding is not required.

System / Application	Terminal
Single-phase / 3-wire	
Three-phase / 3-wire, unbalanced load (2CT)	


## ■ CONFIGURATION CODE: 2

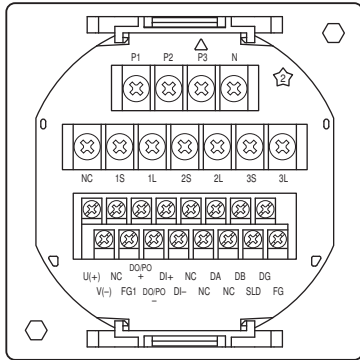


System / Application	Terminal	System / Application	Terminal
Single-phase / 2-wire		Single-phase / 3-wire  Three-phase / 3-wire, unbalanced load (2CT)	
Three-phase / 3-wire, balanced load		Three-phase / 4-wire, balanced load	
Three-phase / 3-wire, unbalanced load (3CT)		Three-phase / 4-wire, unbalanced load	

Note: For low voltage circuit, grounding is not required.


## EXTERNAL INTERFACE CODE: 1

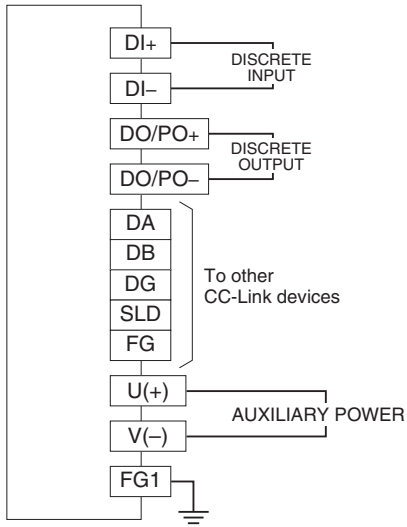


## EXTERNAL INTERFACE CODE: 2

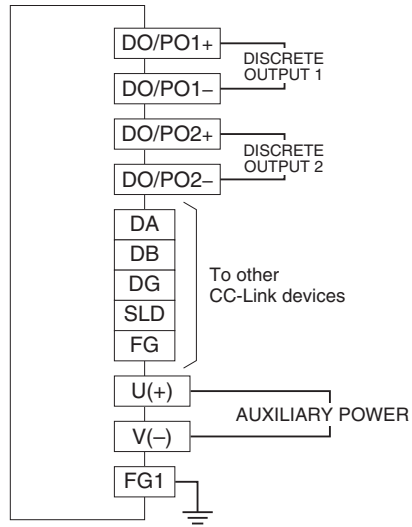


• Discrete Input Connection E.g.



• Discrete Output Connection E.g.

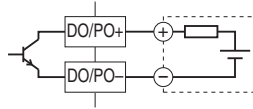


## COMMUNICATION CABLE CONNECTIONS

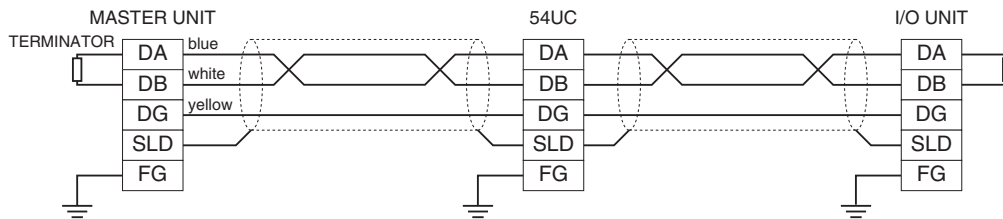


## EXTERNAL DIMENSIONS unit: mm (inch)

### ■ CONFIGURATION CODE: 1

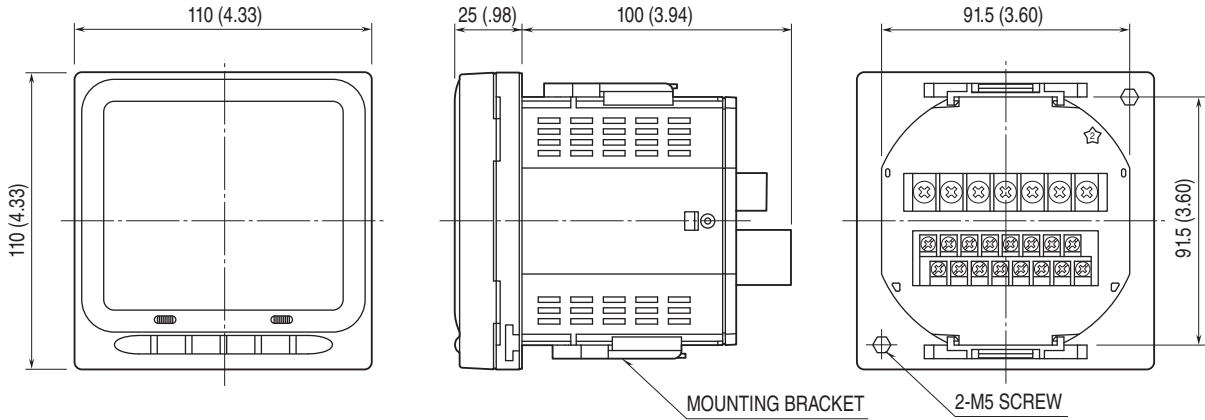

### ■ CONFIGURATION CODE: 2

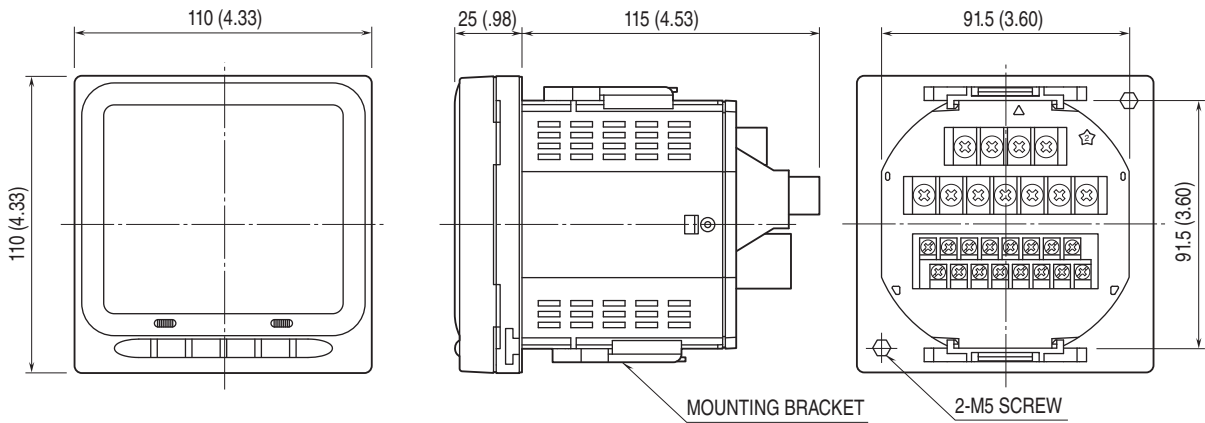

Specifications are subject to change without notice.