
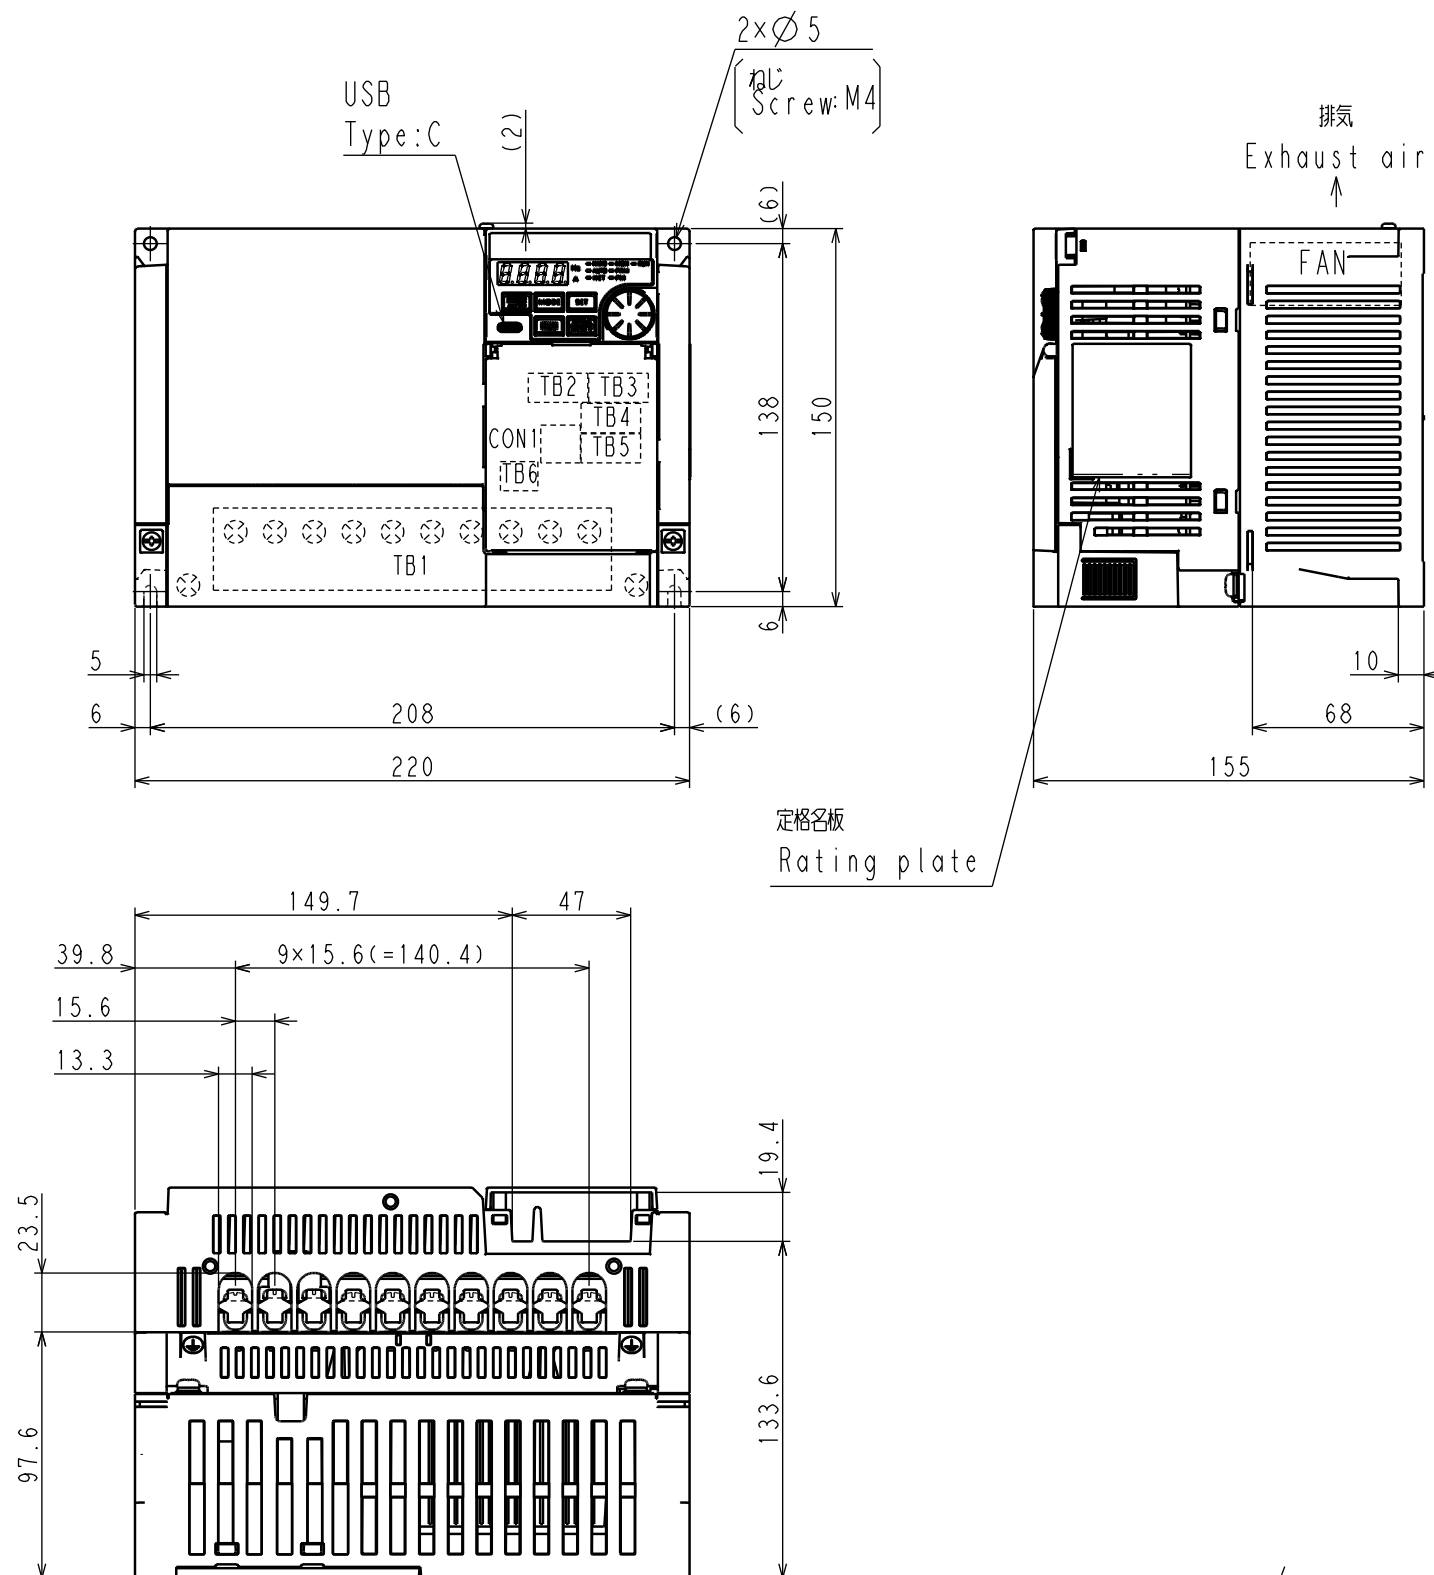


外形寸法
Outline dimensions

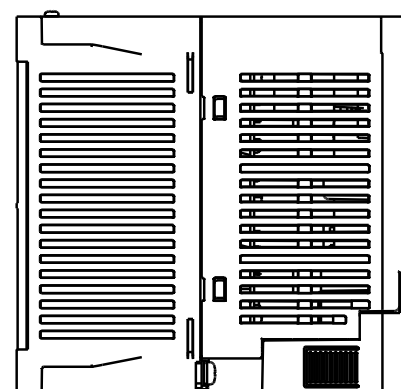

端子配列
Terminal arrangement

TB2						TB3					
10	2	5	4	AM	5	S1	S2	PC	So	SoC	PC

TB4					
STF	STR	RL	RM	RH	SD

CON1	
RS485	

TB5					
T+	T-	R+/FU	R-/SD	SE	RUN

TB6		
A	B	C

TB1											
N/-	P1	P/+	PR	R/L1	S/L2	T/L3	U	V	W		


⊕	PE/ground	PE/ground	⊕
---	-----------	-----------	---

端子ねじサイズ
Terminal screw size

TB1	TB2, 3, 4, 5, 6	⊕
M5	-	M5

TB2, 3, 4, 5, 6: スプリングクランプ端子台
Spring clamp terminal block
電線サイズ 0.25~1.5mm²/AWG 24~16
Wire size

操作パネルキー配列
OPERATION PANEL key arrangement



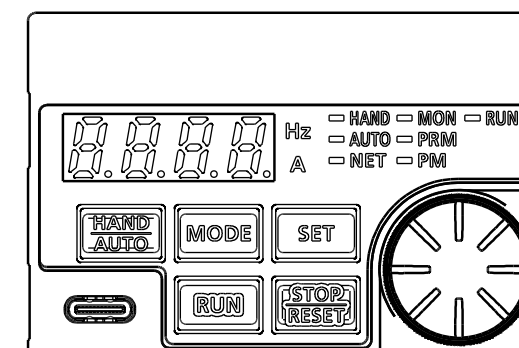


質量
Mass




5.5K-238	2.4kg
7.5K-318	2.5kg

寸法単位: mm
DIM. IN mm

端子台配置
Terminal block layout

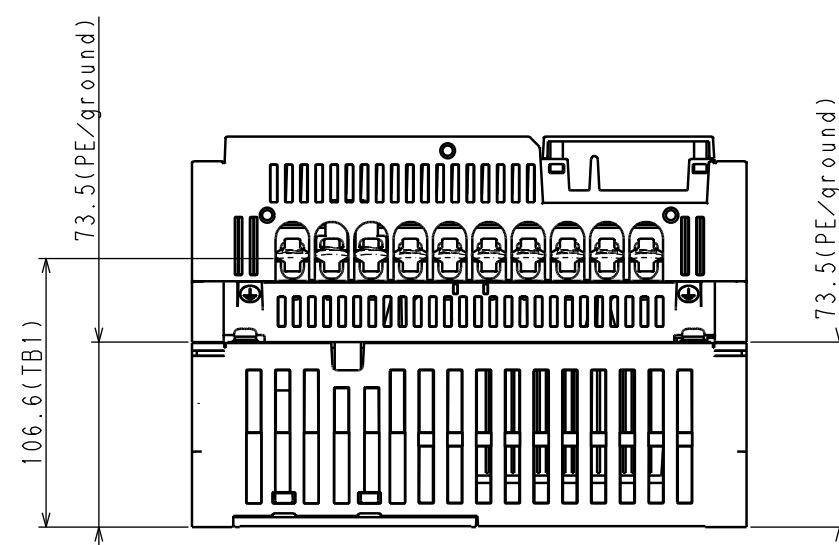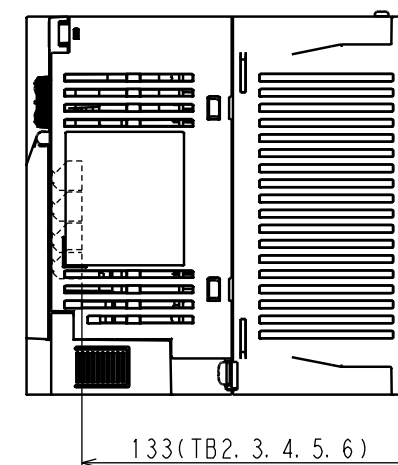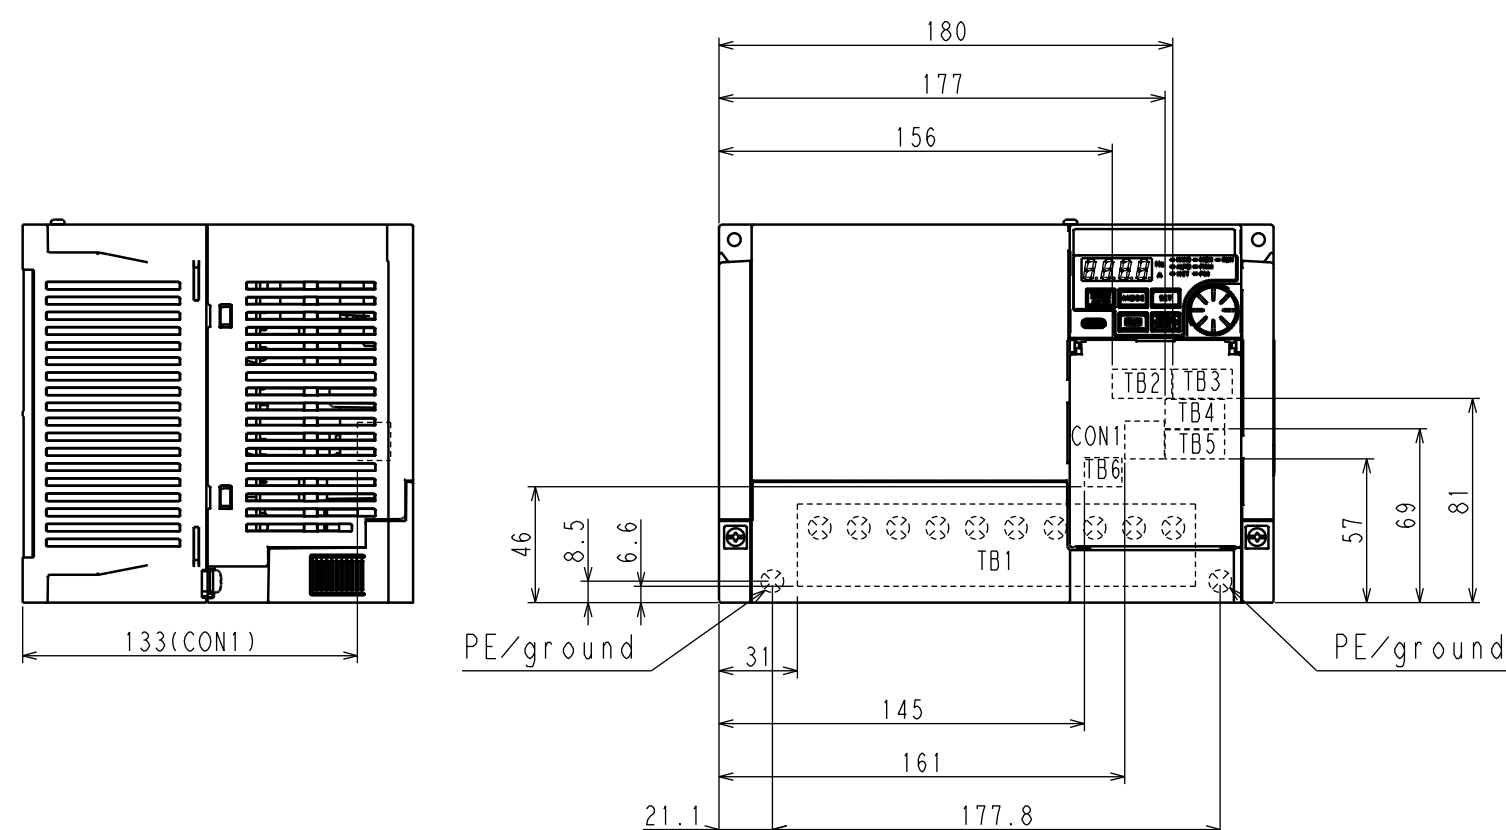

端子台詳細図
Detail drawings of terminal blocks

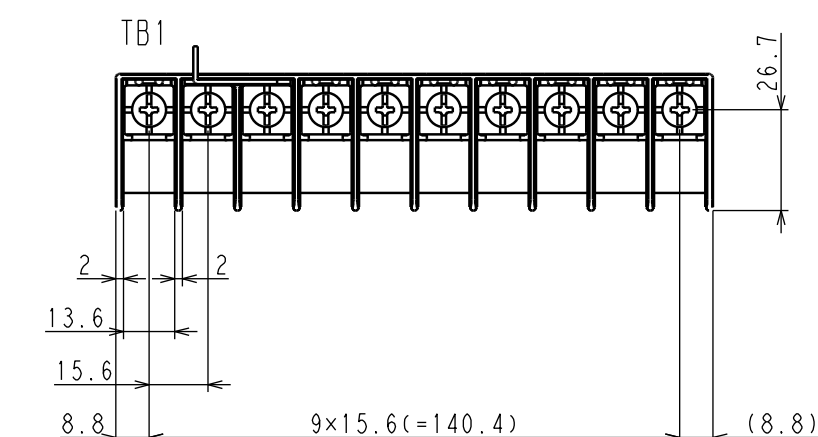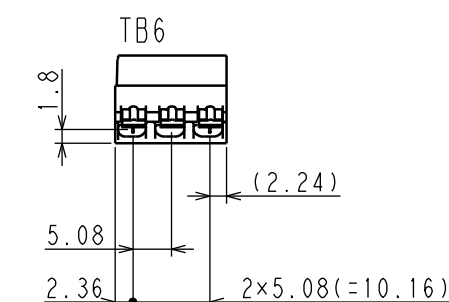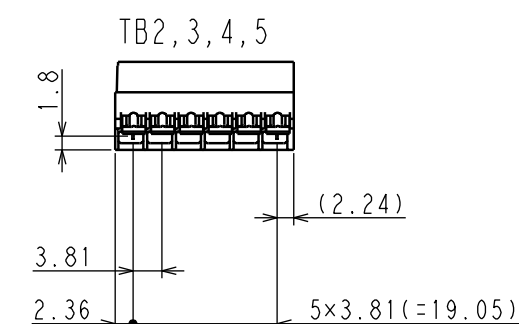

(寸法単位: mm
DIM. IN mm)