

## Plug-in Signal Conditioners K-UNIT

### PEAK HOLD


(isolated)

#### Functions & Features

- Track mode: the output follows proportionally to the input
- Peak-hold mode: responds only to an increasing signal, holding the maximum value until a higher signal or a command to reset is received
- Minimum value (valley) hold selectable
- Isolation up to 2000 V AC
- High-density mounting

#### Typical Applications

- Monitoring peak power consumption

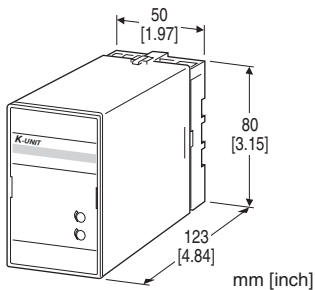

## MODEL: KHS[1]-[2][3]-[4][5]

### ORDERING INFORMATION

- Code number: KHS[1]-[2][3]-[4][5]
- Specify a code from below for each of [1] through [5]. (e.g. KSHS-6A-B/Q)
- Special input and output ranges (For codes Z & 0)
- Specify the specification for option code /Q (e.g. /C01/S01)

#### [1] HOLD FUNCTION

- H: Peak hold
- L: Valley hold

#### [2] INPUT

Current

- A: 4 - 20 mA DC (Input resistance 250 Ω)
- A1: 4 - 20 mA DC (Input resistance 50 Ω)
- B: 2 - 10 mA DC (Input resistance 500 Ω)
- C: 1 - 5 mA DC (Input resistance 1000 Ω)
- D: 0 - 20 mA DC (Input resistance 50 Ω)
- E: 0 - 16 mA DC (Input resistance 62.5 Ω)
- F: 0 - 10 mA DC (Input resistance 100 Ω)
- G: 0 - 1 mA DC (Input resistance 1000 Ω)

- H: 10 - 50 mA DC (Input resistance 100 Ω)
  - J: 0 - 10 μA DC (Input resistance 1000 Ω)
  - K: 0 - 100 μA DC (Input resistance 1000 Ω)
  - GW: -1 - +1 mA DC (Input resistance 1000 Ω)
  - FW: -10 - +10 mA DC (Input resistance 100 Ω)
  - Z: Specify current (See INPUT SPECIFICATIONS)
- Voltage
- 1: 0 - 10 mV DC (Input resistance 10 kΩ min.)
  - 15: 0 - 50 mV DC (Input resistance 10 kΩ min.)
  - 16: 0 - 60 mV DC (Input resistance 10 kΩ min.)
  - 2: 0 - 100 mV DC (Input resistance 100 kΩ min.)
  - 3: 0 - 1 V DC (Input resistance 1 MΩ min.)
  - 4: 0 - 10 V DC (Input resistance 1 MΩ min.)
  - 5: 0 - 5 V DC (Input resistance 1 MΩ min.)
  - 6: 1 - 5 V DC (Input resistance 1 MΩ min.)
  - 4W: -10 - +10 V DC (Input resistance 1 MΩ min.)
  - 5W: -5 - +5 V DC (Input resistance 1 MΩ min.)
  - 0: Specify voltage (See INPUT SPECIFICATIONS)

#### [3] OUTPUT

Current

- A: 4 - 20 mA DC (Load resistance 750 Ω max.)
  - B: 2 - 10 mA DC (Load resistance 1500 Ω max.)
  - C: 1 - 5 mA DC (Load resistance 3000 Ω max.)
  - D: 0 - 20 mA DC (Load resistance 750 Ω max.)
  - E: 0 - 16 mA DC (Load resistance 900 Ω max.)
  - F: 0 - 10 mA DC (Load resistance 1500 Ω max.)
  - G: 0 - 1 mA DC (Load resistance 15 kΩ max.)
  - Z: Specify current (See OUTPUT SPECIFICATIONS)
- Voltage
- 1: 0 - 10 mV DC (Load resistance 10 kΩ min.)
  - 2: 0 - 100 mV DC (Load resistance 100 kΩ min.)
  - 3: 0 - 1 V DC (Load resistance 100 Ω min.)
  - 4: 0 - 10 V DC (Load resistance 1000 Ω min.)
  - 5: 0 - 5 V DC (Load resistance 500 Ω min.)
  - 6: 1 - 5 V DC (Load resistance 500 Ω min.)
  - 4W: -10 - +10 V DC (Load resistance 2000 Ω min.)
  - 5W: -5 - +5 V DC (Load resistance 1000 Ω min.)
  - 0: Specify voltage (See OUTPUT SPECIFICATIONS)

#### [4] POWER INPUT

AC Power

- B: 100 V AC
- C: 110 V AC
- D: 115 V AC
- F: 120 V AC
- G: 200 V AC
- H: 220 V AC
- J: 240 V AC

DC Power

- S: 12 V DC

R: 24 V DC

## [5] OPTIONS

blank: none

/Q: With options (specify the specification)

### SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to our web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

TERMINAL SCREW MATERIAL

/S01: Stainless steel

### GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3.5 screw terminals

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output to power

Overrange output: Approx. -10 to +120 % at 1 - 5 V

Zero adjustment: -5 to +5 % (front)

Span adjustment: 95 to 105 % (front)

Hold control: Holds when opening the terminals 5 - 6; tracks when closing them

### INPUT SPECIFICATIONS

#### ■ DC Current:

Shunt resistor attached to the input terminals (0.5 W)

Specify input resistance value for code Z.

#### ■ DC Voltage: -300 - +300 V DC

Minimum span: 3 mV

Offset: Max. 1.5 times span

#### Input resistance

Span 3 - 10 mV :  $\geq 10 \text{ k}\Omega$

Span 10 - 100 mV :  $\geq 10 \text{ k}\Omega$

Span 0.1 - 1 V :  $\geq 100 \text{ k}\Omega$

Span  $\geq 1 \text{ V}$  :  $\geq 1 \text{ M}\Omega$

#### ■ HOLD CONTROL

Contact rating: 5 V @1 mA

Detection levels:  $\leq 1.25 \text{ k}\Omega / 1 \text{ V}$  at Track

$\geq 20 \text{ k}\Omega / 4 \text{ V}$  at Hold

### OUTPUT SPECIFICATIONS

#### ■ DC Current: 0 - 20 mA DC

Minimum span: 1 mA

Offset: Max. 1.5 times span

Load resistance: Output drive 15 V max.

#### ■ DC Voltage: -10 - +12 V DC

Minimum span: 5 mV

Offset: Max. 1.5 times span

Load resistance: Output drive 10 mA max.; 5 mA for negative voltage output; at  $\geq 0.5 \text{ V}$

### INSTALLATION

#### Power input

• AC: Operational voltage range: rating  $\pm 10 \%$ , 50/60  $\pm 2 \text{ Hz}$ , approx. 2 VA

• DC: Operational voltage range: rating  $\pm 10 \%$ , ripple 10 %p-p max., approx. 2 W (90 mA at 24 V)

Operating temperature: -5 to +55°C (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 400 g (0.88 lb)

### PERFORMANCE in percentage of span

Accuracy:  $\pm 0.2 \%$

Temp. coefficient:  $\pm 0.02 \text{ \%}/^\circ\text{C}$  ( $\pm 0.01 \text{ \%}/^\circ\text{F}$ )


Response time:  $\leq 0.5 \text{ sec.}$  (0 - 90 %)

Line voltage effect:  $\pm 0.1 \%$  over voltage range

Insulation resistance:  $\geq 100 \text{ M}\Omega$  with 500 V DC


Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

## EXTERNAL DIMENSIONS unit: mm [inch]

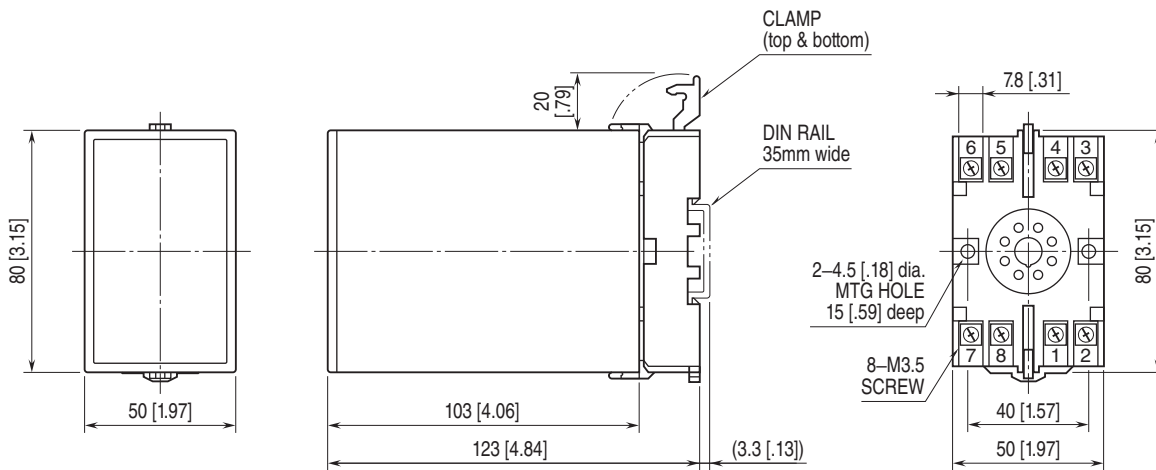


• When mounting, no extra space is needed between units.

## TERMINAL ASSIGNMENTS unit: mm [inch]

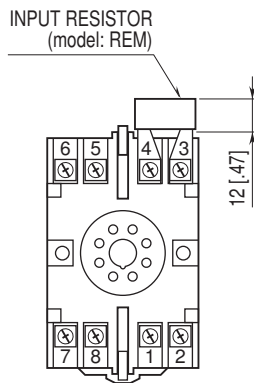

Input shunt resistor attached for current input.

## SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

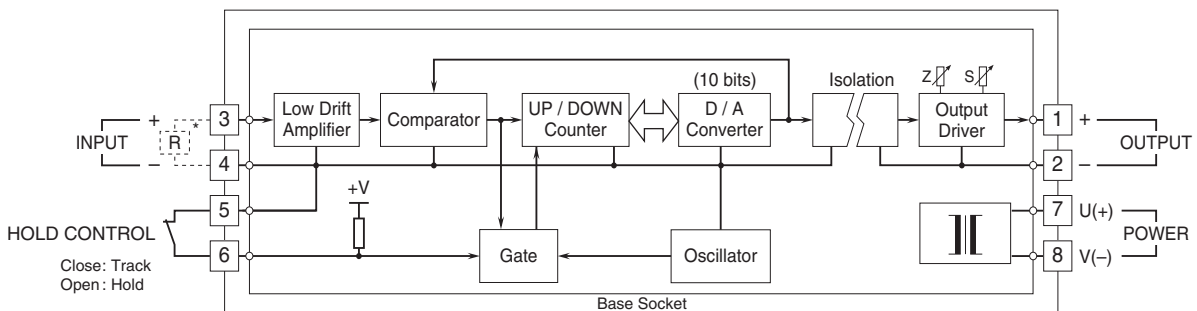

\*Input shunt resistor attached for current input.



Specifications are subject to change without notice.