MODEL: MGA-100


Lightning Surge Protectors for Electronics Equipment M-RESTER

LIGHTNING SURGE PROTECTOR FOR POWER SUPPLY USE

2 A, 120 V AC / 170 V DC; rack-mounted)

Functions & Features

- Designed specifically for AC/DC power supplies up to 2 amps
- Rack-mounted
- Two channels in one housing

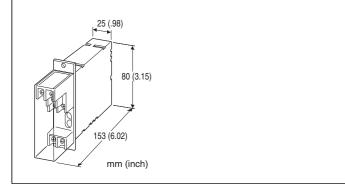

MODEL: MGA-100

ORDERING INFORMATION

• Code number: MGA-100

GENERAL SPECIFICATIONS

Construction: Rack-mounted; terminal access via screw

terminals at the front; terminal cover provided **Connection**: M3.5 screw terminals (torque 0.8 N·m)

Screw terminal: Nickel-plated steel

Housing material: Flame-resistant resin (black) **Monitor lamp**: Red on when the power is supplied.

INSTALLATION

Operating temperature: -5 to +55°C (23 to 131°F)
Operating humidity: 30 to 90 %RH (non-condensing)
Mounting: Rack-mounted; Standard Rack Mounting Frame

BX-16G available **Weight**: 200 g (0.44 lbs)

PERFORMANCE

Discharge voltage (peak voltage)

Line to line: 190 V min. Line to ground: 410 V min. Maximum surge voltage Line to line: 400 V max. Line to ground: 800 V max.

(The maximum voltage that could pass through M-RESTER. Protected equipment must be able to withstand this voltage

for very short time period.) Response time: $\leq 0.1 \ \mu sec.$

Leakage current

Line to line: \leq 2 mA at 150 V DC Line to ground: \leq 1 mA at 300 V DC

Max. discharge current (Imax): 1000 A (8/20 µsec.)


Max. load current: 2 A

Rated line voltage: 120 V AC, 170 V DC


MODEL: MGA-100

CONNECTION EXAMPLES

Connection example with Ch.1




GROUNDING




A crossover wire between M-RESTER ground and ground or metallic housing of equipment is required for protection. If the protected equipment has no ground terminal, ground the M-RESTER only.

EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENT mm (inch)

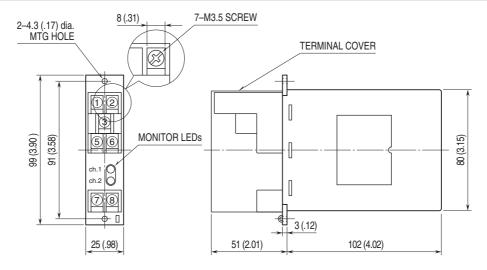


MOUNTING REQUIREMENTS unit: mm (inch)

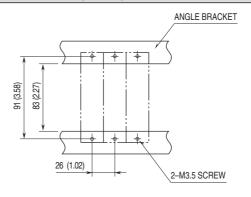

MODEL: MGA-100

SCHEMATIC CIRCUITRY

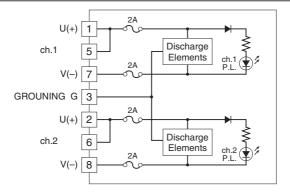

Make sure to connect a DC power source in the proper polarity in order to turn the LED on.



Specifications are subject to change without notice.