

Super-mini Signal Conditioners Mini-M Series

SIGNAL TRANSMITTER


(high-accuracy, ultra-high speed response 30 μ sec.)

Functions & Features

- Converts DC input from a sensor into a standard process signal
- Frequency characteristics 12 kHz (-3 dB)
- 30-microsecond response

Typical Applications

- Isolation for a vibration analyzing system
- Isolation for Discharge/Charge tester

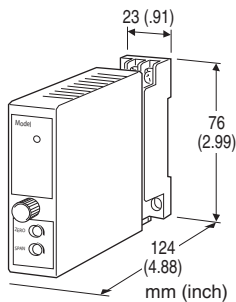

MODEL: M2VF3-[1]4W-R[2]

ORDERING INFORMATION

- Code number: M2VF3-[1]4W-R[2]
- Specify a code from below for each of [1] and [2].
(e.g. M2VF3-04W-R/CE/Q)
- Special input range (For code 0: e.g. -164 - +164 mV DC)
- Specify the specification for option code /Q
(e.g. /C01/S01)

[1] INPUT

Voltage

- 2W:** -100 - +100 mV DC (Input resistance 1 M Ω min.)
- 4W:** -10 - +10 V DC (Input resistance 1 M Ω min.)
- 5W:** -5 - +5 V DC (Input resistance 1 M Ω min.)
- 8W:** -20 - +20 V DC (Input resistance 1 M Ω min.)
- 0:** Specify voltage (Select input range as indicated below)
- 20 - +20 mV DC
- 24 - +24 mV DC
- 40 - +40 mV DC
- 85 - +85 mV DC
- 164 - +164 mV DC
- 200 - +200 mV DC
- 15 - +15 V DC
- 25 - +25 V DC

- 55 - +55 V DC
- 60 - +60 V DC
- 300 - +300 V DC *
- 350 - +350 V DC *
- 400 - +400 V DC *
- 600 - +600 V DC *
- 800 - +800 V DC *

* Select '/N' for 'Standards & Approvals' code.
Multiple installation bases are unable.

OUTPUT

Voltage

4W: -10 - +10 V DC (Load resistance 2000 Ω min.)

POWER INPUT

DC Power

R: 24 V DC

(Operational voltage range 24 V \pm 10 %, ripple 10 %p-p max.)

[2] OPTIONS (multiple selections)

Standards & Approvals (must be specified)

/N: Without CE or UKCA

/CE: CE marking

/UK: CE, UKCA marking

Other Options

blank: none

/Q: Option other than the above (specify the specification)

SPECIFICATIONS OF OPTION: Q (multiple selections)

COATING (For the detail, refer to M-System's web site.)

/C01: Silicone coating

/C02: Polyurethane coating

/C03: Rubber coating

/C04: Polyolefin coating

TERMINAL SCREW MATERIAL

/S01: Stainless steel

GENERAL SPECIFICATIONS

Construction: Plug-in

Connection: M3 screw terminals (torque 0.8 N·m)

Screw terminal: Chromated steel (standard) or stainless steel

Housing material: Flame-resistant resin (black)

Isolation: Input to output to power

Overrange input: -5 to +105 %

Zero adjustment: -1 to +1 %; multi-turn screwdriver adjustments (front)

Span adjustment: 99 to 101 %; multi-turn screwdriver adjustments (front)

Power indicator LED: Green LED turns on when the power is

supplied.

INPUT SPECIFICATIONS

Input resistance: $\geq 1 \text{ M}\Omega$ (3 k Ω min. in power failure)

OUTPUT SPECIFICATIONS

Parallel load capacitance: $\leq 2000 \text{ pF}$

INSTALLATION

Power consumption

•DC: $\leq 0.6 \text{ W}$

Operating temperature: -5 to $+55^\circ\text{C}$ (23 to 131°F)

Operating humidity: 30 to 90 %RH (non-condensing)

Mounting: Surface or DIN rail

Weight: 150 g (0.33 lb)

PERFORMANCE in percentage of span

Accuracy: $\pm 0.01 \%$

Temp. coefficient: $\pm 0.005 \%/^\circ\text{C}$ ($\pm 0.003 \%/^\circ\text{F}$)

Frequency characteristics: 12 kHz, -3 dB

Response time: $\leq 30 \mu\text{sec}$. (0 - 90 %)

Line voltage effect: $\pm 0.01 \%$ over voltage range

Insulation resistance: $\geq 100 \text{ M}\Omega$ with 500 V DC

Dielectric strength: 2000 V AC @1 minute (input to output to power to ground)

STANDARDS & APPROVALS

EU conformity:

EMC Directive

EMI EN 61000-6-4

EMS EN 61000-6-2


RoHS Directive

UK conformity (UKCA):


The UK legislations and designated standards are equivalent to the applicable EU directives.

(Refer to M-System's website for more information about the legislations and designated standards.)

EXTERNAL VIEW

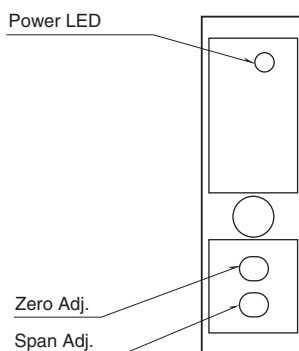


EXTERNAL DIMENSIONS & TERMINAL ASSIGNMENTS unit: mm [inch]

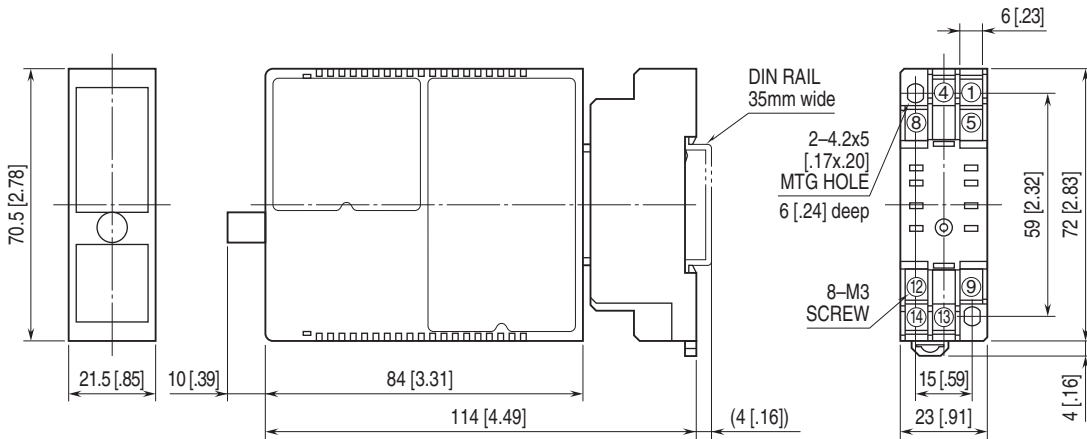


• When mounting, no extra space is needed between units.

SCHEMATIC CIRCUITRY & CONNECTION DIAGRAM

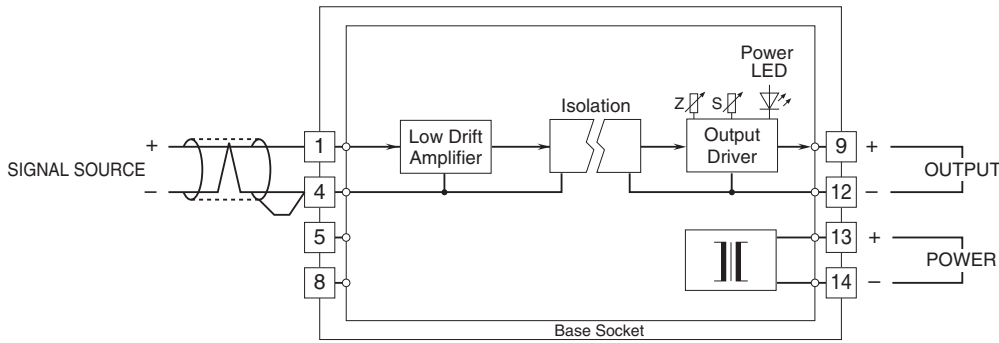

The M2VF3, by its fast-response feature, is not designed to eliminate noise present in the input signal. Use a shielded twisted-pair cable to prevent noise from entering through the input wiring.

• At input signal code "0", signal source is allocated between terminals 8 and 4 when input exceeds 300V.

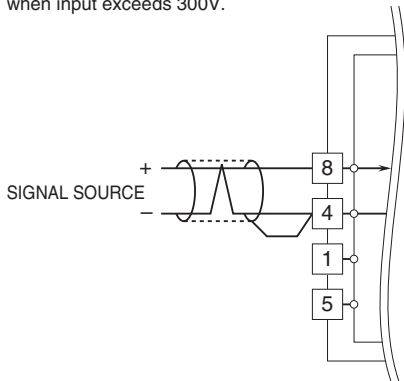

Specifications are subject to change without notice.