

## Final Control Elements

### MINI-TOP ELECTRONIC ACTUATOR


(rotary type; CC-Link)

#### Functions & Features

- Compact control valve actuator (drive unit) that can be connected directly to CC-Link equipped PLC
- Wiring cost can be reduced with the single cable daisy-chain connection
- Can be used along with other CC-Link devices on the same cable
- Information readable via CC-Link
- The information read is available for the maintenance and checking of valves and Mini-Top Electronic Actuator
- 1/1000 high-resolution type
- Angle adjustment in fully closed and open stop positioning is easy with the built-in electronic limiter
- Built-in overload protection

#### Typical Applications

- Actuator for automatic control valve in pilotplants
- Air-conditioning in buildings or plants
- Micro-flow control for pharmaceutical injection
- For small-size control valves

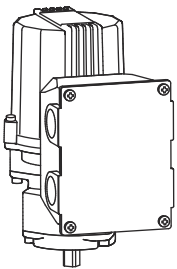

### MODEL: MRP5C2-14-0R

#### ORDERING INFORMATION

- Code number: MRP5C2-14-0R

#### SPAN

1: 45 to 90 degrees

#### OPERATION TIME, TORQUE

4: 13 s / 90 ° (10 N·m)

#### CE MARKING

0: Without

## POWER INPUT

#### DC Power

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

#### PACKAGE INCLUDES...

- Terminating resistor (110 Ω, 0.5 W)

#### GENERAL SPECIFICATIONS

**Degree of protection:** IP66

**Operation at a communication error:**

Turn counterclockwise, clockwise or stop

(DIP SW selectable; factory set to 'stop')

Note: Counterclockwise or clockwise if seen from the cover

**Electrical connection:** M3 screw terminals (torque 0.8 N·m)

**Screw terminal:** Nickel-plated steel

**Transmission cable:** Conforms to CC-Link Ver 1.10

**Housing material:** Diecast aluminum

(Cast aluminum for the terminal box; steel for the cover)

**Drive:** Stepping motor

**Insulation class:** E

**Position detection:** Potentiometer

**Deadband:** 0.1 - 1.9 % adjustable (factory set to 1.5 %)

**Restarting timer:** 0 - 10 sec. adjustable

(factory set to 1.5 sec.)

**Isolation:** Housing or FE1 to communication to power

**Zero adjustment:** 0 - 25 %

**Span adjustment:** 50 - 100 %

**Protective functions:** Overload protection

**Status indicator LED:** Red light blinks in 2 sec. intervals in normal operations; blinks in 0.5 sec. intervals when a foreign object is detected mechanically caught inside.

**Manual operating handle:** Not available

#### CC-Link COMMUNICATION

**Protocol:** CC-Link V1.10

**Device type:** Remote device station

**Station No. setting:** Rotary switch; 1 - 64

**Required node:** 1

**Baud rate setting:** Rotary switch

**L RUN indicator:** Red LED

**L ERR. indicator:** Red LED

#### INSTALLATION

**Power consumption**

- DC: Approx. 0.7 A

**Operating temperature:** -5 to +55°C (23 to 131°F)

**Operating humidity:** 30 to 85 %RH (non-condensing)

**Vibration:** 0.5 G (4.9 m/s<sup>2</sup>) max.

**Mounting position:** All directions

Do not mount the actuator with its output stem or wiring conduit on the upside if the actuator is to be exposed to dripping water.

**Weight:** Approx. 2.0 kg (4.4 lb)

## PERFORMANCE

**Resolution:** 1/1000 or 0.09°, whichever is greater (deadband set to 0.1 %)

**Insulation resistance:**  $\geq 100 \text{ M}\Omega$  with 100 V DC

**Dielectric strength:** 100 V AC @ 1 minute  
(housing or FE1 to communication to power)

## COMMUNICATIONS

### ■ MASTER to SLAVE

DATA TYPE	ADDRESS	FUNCTION	DETAIL
Bit	RY0	Forced Closed Position Input *1	0 : Disable 1 : Position = 0%
	RY1	Forced Open Position Input *1	0 : Disable 1 : Position = 100%
	RY2		
	RY3		
	RY4		
	RY5		
	RY6		
	RY7		
	RY8	Enable Target Position Input	0 : Disable 1 : Enable
	RY9		
	RYA	Reset Motor Deadlock Alarm	Motor deadlock alarm is cancelled when '1' is set.
	RYB	Clear Motor Starting Counter	Motor starting counter is reset to 0 when '1' is set.
	RYC	Clear Motor Reversing Counter	Motor reversing counter is reset to 0 when '1' is set.
	RYD	Clear Accumulated Running Distance	Accumulated running distance is reset to 0 when '1' is set.
	RYE		
	RYF		
Word	RWw0	Target Position Input	Signed, 0.01% increments (e.g. 100 = 1.00%) Valid only when Enable Target Position Input is enabled.
	RWw1		
	RWw2		
	RWw3		


\*1. Valid regardless of the RY8 (Enable Target Position Input) status. Stopped when '1' is set both at RY0 and RY1.

## ■ SLAVE to MASTER


DATA TYPE	ADDRESS	FUNCTION	DETAIL
Bit	RX0		
	RX1		
	RX2		
	RX3		
	RX4		
	RX5		
	RX6		
	RX7		
	RX8	Motor Deadlock Alarm	0 : Normal 1 : Overload or other deadlock alarm
	RX9	Target Position Input Error	0 : Normal 1 : Out of range from -0.5 to +100.5%
	RXA	System Error	0 : Normal 1 : Memory or other system error
	RXB	Control Status	0 : Remote (CC-Link) 1 : Manual
	RXC		
	RXD		
	RXE		
RXF			
Word	RWr0	Position Output	Signed, 0.01% increments (e.g. 100 = 1.00%)
	RWr1	Motor Starting Counter *2	1 count per every 100 starting actions
	RWr2	Motor Reversing Counter *2	1 count per every 100 reversing actions
	RWr3	Accumulated Running Distance (%) *2	1 count per running 100% distance every time

\*2. When the count reaches 65535, the value is held until it is reset.

## EXTERNAL DIMENSIONS unit: mm (inch)

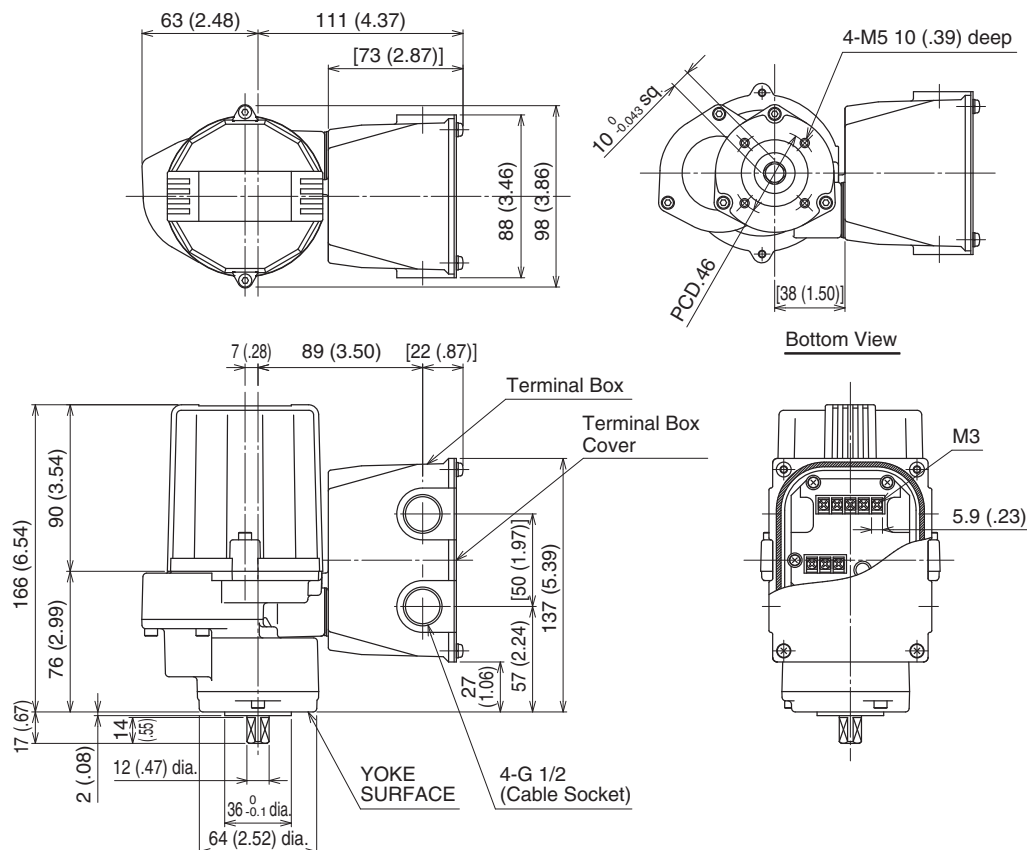

## SCHEMATIC CIRCUITRY

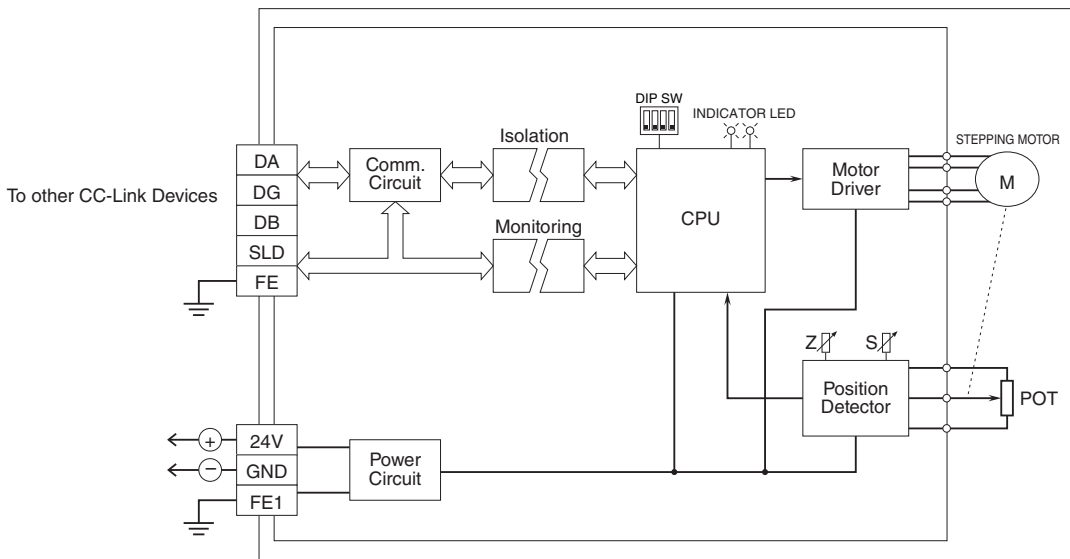

Specifications are subject to change without notice.