

## Final Control Elements

### MINI-TOP ELECTRONIC ACTUATOR


(rotary type; CC-Link)

#### Functions & Features

- Small-size control valve actuator
- Direct connection to CC-Link capable PLC and other devices on the same network
- Easy wired
- Uploading device information via CC-Link for maintenance purpose
- 1/1000 high resolution

#### Typical Applications

- Actuator for automatic control valve in pilotplants
- Air-conditioning in buildings or plants
- Micro-flow control for pharmaceutical injection
- For small-size control valves



### MODEL: MRP6C-[1][2]-0R[3]

#### ORDERING INFORMATION

- Code number: MRP6C-[1][2]-0R[3]
- Specify a code from below for each of [1] through [3].  
(e.g. MRP6C-14-0R/Q)
- Specify the specification for option code /Q  
(e.g. /SET)

#### [1] SPAN

- 1: 45 to 90 degrees  
2: 90 to 180 degrees

#### [2] OPERATION TIME, TORQUE

- 3: 4 seconds / 90°, 10 N·m  
4: 7 seconds / 90°, 16 N·m  
6: 13 seconds / 90°, 33 N·m

#### CE MARKING

0: Without

## POWER INPUT

#### DC Power

R: 24 V DC

(Operational voltage range 24 V ±10 %, ripple 10 %p-p max.)

### [3] OPTIONS

blank: none

/Q: With options (specify the specification)

#### SPECIFICATIONS OF OPTION: Q

##### EX-FACTORY SETTING

/SET: Preset according to the Ordering Information Sheet  
(No. ESU-4865)

#### GENERAL SPECIFICATIONS

Degree of protection: IP66

Operation at a communication error: Turn counterclockwise, clockwise or stop (DIP SW selectable; factory set to 'stop')

Note: Counterclockwise or clockwise if seen from the cover

Power circuit connection: 4-core microconnector, male

Power cable: Cable with connector (e.g. OMRON XS2F or XS2WD42)

Transmission cable: Conforms to CC-Link  
(e.g. Woodhead CC-Link Micro-Change)

Housing material: Cast aluminum

Drive: Stepping motor

Insulation class: E

Position detection: Potentiometer

Deadband: 0.1 - 1.9 % adjustable (factory set to 1.5 %)

Restarting timer: 0 - 10 sec. adjustable  
(factory set to 1.5 sec.)

Isolation: Housing or communication to power

Zero adjustment: 0 - 25 %

Span adjustment: 50 - 100 %

Protective functions: Overload protection

Status indicator LED: Red light blinks in 2 sec. intervals in normal operations; blinks in 0.5 sec. intervals when a foreign object is detected mechanically caught inside.

Manual operation: Available

#### CC-Link COMMUNICATION

Protocol: CC-Link V1.10

Device type: Remote device station

Station No. setting: Rotary switch; 1 - 64

Required node: 1

Baud rate setting: Rotary switch

L RUN indicator: Red LED

L ERR. indicator: Red LED

**OUTPUT SPECIFICATIONS****■ Operation time & torque (at rated power voltage)**

MRP6C-x3: 4 sec./90° 10 N·m (7.38 ft·lbf)

MRP6C-x4: 7 sec./90° 16 N·m (11.8 ft·lbf)

MRP6C-x6: 13 sec./90° 33 N·m (24.3 ft·lbf)

**INSTALLATION****Current consumption**

•DC: Approx. 0.7 A

**Operating temperature:** -5 to +55°C (23 to 131°F)**Operating humidity:** 30 to 85 %RH (non-condensing)**Vibration:** 0.5 G (4.9 m/s<sup>2</sup>) max.**Mounting position:** All directions

Do not mount the actuator with its output stem or cable connector on the upside if the actuator is to be exposed to dripping water.

**Weight:** 3.0 kg (6.6 lb)**PERFORMANCE****Resolution:** 1/1000 or 0.09°, whichever is greater (deadband set to 0.1 %)**Insulation resistance:** ≥ 100 MΩ with 100 V DC**Dielectric strength:** 100 V AC @ 1 minute  
(housing or communication to power)**COMMUNICATIONS****■ MASTER to SLAVE**

| DATA TYPE | ADDRESS | FUNCTION                           | DETAIL  |
|-----------|---------|------------------------------------|---|
| Bit       | RY0     | Forced Closed Position Input *1    | 0 : Disable 1 : Position = 0%   |
|           | RY1     | Forced Open Position Input *1      | 0 : Disable 1 : Position = 100%   |
|           | RY2     |                                    |   |
|           | RY3     |                                    |   |
|           | RY4     |                                    |   |
|           | RY5     |                                    |   |
|           | RY6     |                                    |   |
|           | RY7     |                                    |   |
|           | RY8     | Enable Target Position Input       | 0 : Disable 1 : Enable  |
|           | RY9     |                                    |   |
|           | RYA     | Reset Motor Deadlock Alarm         | Motor deadlock alarm is cancelled when '1' is set.  |
|           | RYB     | Clear Motor Starting Counter       | Motor starting counter is reset to 0 when '1' is set.   |
|           | RYC     | Clear Motor Reversing Counter      | Motor reversing counter is reset to 0 when '1' is set.  |
|           | RYD     | Clear Accumulated Running Distance | Accumulated running distance is reset to 0 when '1' is set.   |
|           | RYE     |                                    |   |
| RYF       |         |                                    |   |
| Word      | RWw0    | Target Position Input              | Signed, 0.01% increments (e.g. 100 = 1.00%)<br>Valid only when Enable Target Position Input is enabled. |
|           | RWw1    |                                    |   |
|           | RWw2    |                                    |   |
|           | RWw3    |                                    |   |


\*1. Valid regardless of the RY8 (Enable Target Position Input) status. Stopped when '1' is set both at RY0 and RY1.

## ■ SLAVE to MASTER


| DATA TYPE | ADDRESS | FUNCTION                            | DETAIL   |
|-----------|---------|-------------------------------------|--|
| Bit       | RX0     |                                     |  |
|           | RX1     |                                     |  |
|           | RX2     |                                     |  |
|           | RX3     |                                     |  |
|           | RX4     |                                     |  |
|           | RX5     |                                     |  |
|           | RX6     |                                     |  |
|           | RX7     |                                     |  |
|           | RX8     | Motor Deadlock Alarm                | 0 : Normal 1 : Overload or other deadlock alarm  |
|           | RX9     | Target Position Input Error         | 0 : Normal 1 : Out of range from -0.5 to +100.5% |
|           | RXA     | System Error                        | 0 : Normal 1 : Memory or other system error      |
|           | RXB     | Control Status                      | 0 : Remote (CC-Link) 1 : Manual                  |
|           | RXC     |                                     |  |
|           | RXD     |                                     |  |
|           | RXE     |                                     |  |
|           | RXF     |                                     |  |
| Word      | RWr0    | Position Output                     | Signed, 0.01% increments (e.g. 100 = 1.00%)      |
|           | RWr1    | Motor Starting Counter *2           | 1 count per every 100 starting actions           |
|           | RWr2    | Motor Reversing Counter *2          | 1 count per every 100 reversing actions          |
|           | RWr3    | Accumulated Running Distance (%) *2 | 1 count per running 100% distance every time     |

\*2. When the count reaches 65535, the value is held until it is reset.

## EXTERNAL DIMENSIONS unit: mm (inch)

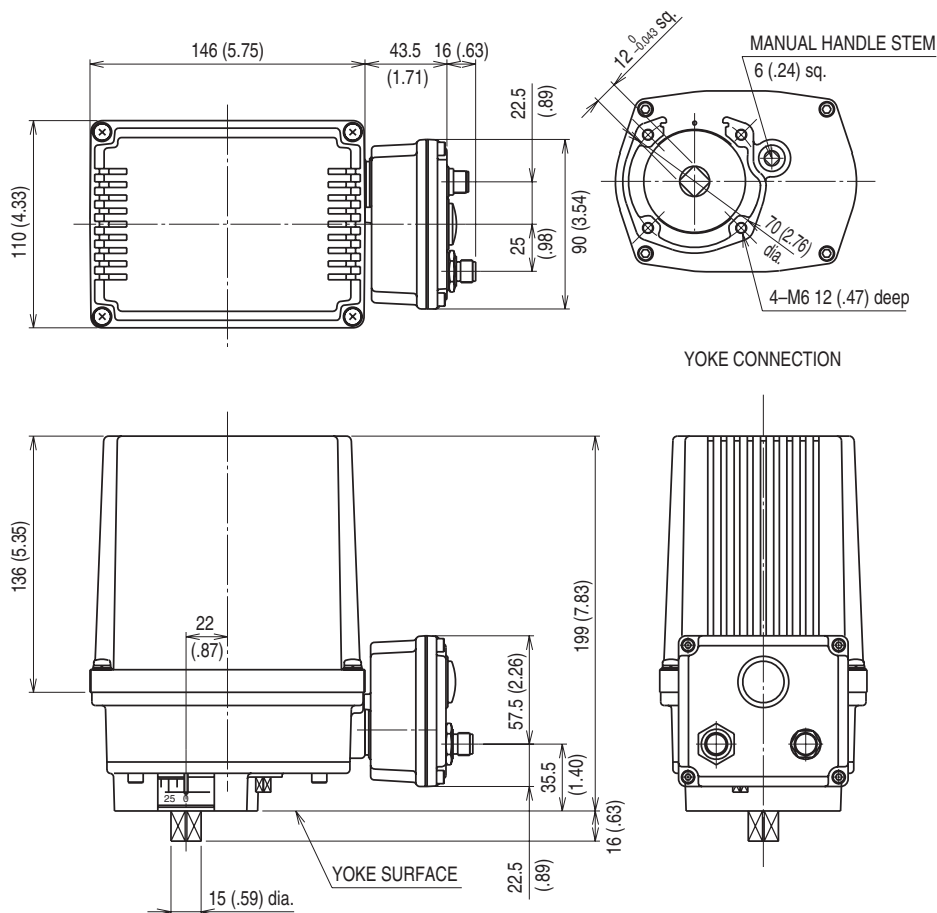

**SCHEMATIC CIRCUITRY**

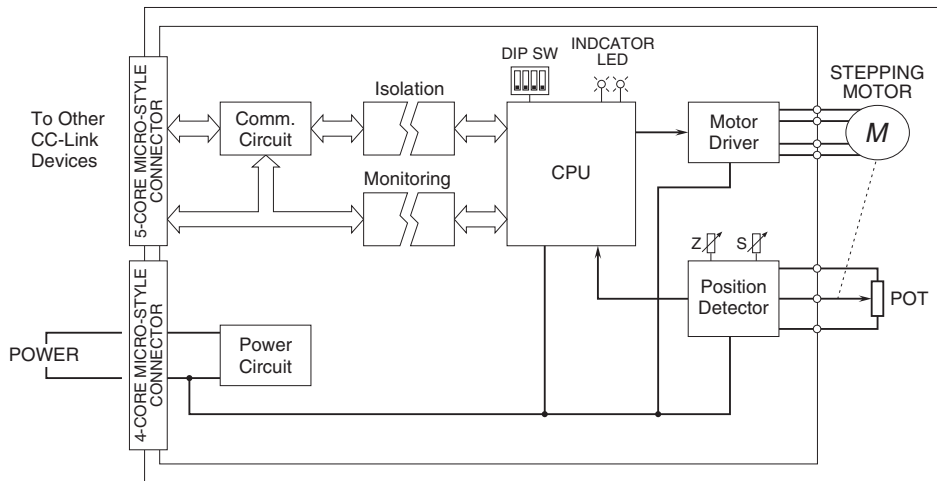

Specifications are subject to change without notice.