


FR-A820-00046(0.4K) to 04750(90K)-R2R  
FR-A840-00023(0.4K) to 03610(132K)-R2R

FR-A840-04320(160K) to 06830(280K)-R2R

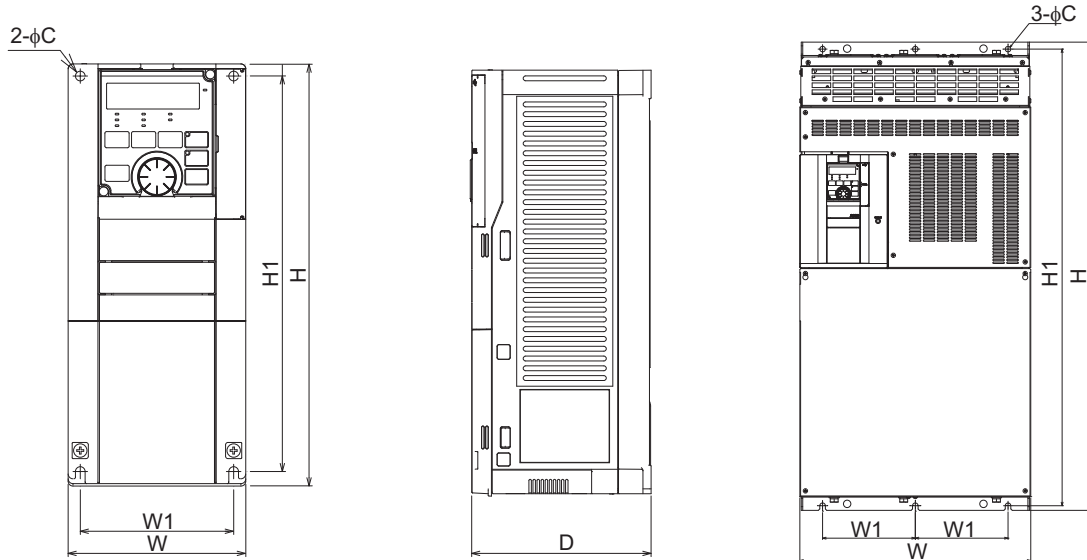

(Unit: mm)

### ◆ 200 V class

Inverter model	W	W1	H	H1	D	C
FR-A820-00046(0.4K)-R2R	110	95	260	245	110	6
FR-A820-00077(0.75K)-R2R					125	
FR-A820-00105(1.5K)-R2R	150	125			140	
FR-A820-00167(2.2K)-R2R						
FR-A820-00250(3.7K)-R2R						
FR-A820-00340(5.5K)-R2R	220	195			300	
FR-A820-00490(7.5K)-R2R						
FR-A820-00630(11K)-R2R	250	230	400	380	190	10
FR-A820-00770(15K)-R2R						
FR-A820-00930(18.5K)-R2R						
FR-A820-01250(22K)-R2R	325	270	550	530	195	12
FR-A820-01540(30K)-R2R	435	380			525	
FR-A820-01870(37K)-R2R						
FR-A820-02330(45K)-R2R	465	410	700	675	250	
FR-A820-03160(55K)-R2R						
FR-A820-03800(75K)-R2R	465	400	740	715	360	
FR-A820-04750(90K)-R2R						

### ◆ 400 V class

Inverter model	W	W1	H	H1	D	C
FR-A840-00023(0.4K)-R2R	150	125	260	245	140	6
FR-A840-00038(0.75K)-R2R						
FR-A840-00052(1.5K)-R2R						
FR-A840-00083(2.2K)-R2R						
FR-A840-00126(3.7K)-R2R						
FR-A840-00170(5.5K)-R2R	220	195	300	285	170	
FR-A840-00250(7.5K)-R2R						
FR-A840-00310(11K)-R2R						
FR-A840-00380(15K)-R2R	250	230	400	380	190	10
FR-A840-00470(18.5K)-R2R						
FR-A840-00620(22K)-R2R	325	270	550	530	195	
FR-A840-00770(30K)-R2R	435	380			525	250
FR-A840-00930(37K)-R2R						
FR-A840-01160(45K)-R2R	465	400	620	595	300	12
FR-A840-01800(55K)-R2R						
FR-A840-02160(75K)-R2R						
FR-A840-02600(90K)-R2R	498	200	1010	985	360	
FR-A840-03250(110K)-R2R						
FR-A840-03610(132K)-R2R	498	200	1010	985	380	
FR-A840-04320(160K)-R2R						
FR-A840-04810(185K)-R2R	680	300	1010	984	380	
FR-A840-05470(220K)-R2R						
FR-A840-06100(250K)-R2R	680	300	1010	984	380	
FR-A840-06830(280K)-R2R						